



Common version

LED strip version

Display screen version



RESIDENTIAL ESS SOLUTION

SE-F5 Pro



Comprehensive Protection

Advanced BMS with active fuse



Ultra-efficient

Support Max. 1C charge & 1C discharge.



Flexible Expansion

Max. 32 units in parallel



Easy Maintenance

Auto-networking, Local monitoring mode for battery, remote monitoring mode for ESS



Optimized Energy Density

Integrated PACK: reduced line loss, enhanced energy density



Reliable Durability

Operates reliably in -20°C to 55°C , natural cooling

RESIDENTIAL ESS SOLUTION




Model		SE-F5 Pro
Main Parameters		
Battery Chemistry		LiFePO ₄
Capacity		100 Ah
Scalability ^[1]		Max. 32 pcs in parallel
Nominal Voltage		51.2 V
Operating Voltage		44.8 V ~ 57.6 V
Nominal Energy		5.12 kWh
Usable Energy ^[2]		5.12 kWh
Charge Current ^[3]	Max. Continuous	100 A
	Peak	150 A (120 sec)
Discharge Current ^[3]	Max. Continuous	100 A
	Peak	150 A (120 sec)
Other Parameter		
Recommend Depth of Discharge		90% DoD
Dimension (W × H × D) (Without hanging board)		404 × 547 × 141 mm
Weight Approximate		44 kg
LED Indicator		LED (SOC, working, protecting) & Buzzer
IP Rating of Enclosure		IP21
Operating Temperature		Charge: 0°C~55°C Discharge: -20°C~55°C
Storage Temperature		0~35°C
Relative Humidity		95% (non-condensing)
Altitude		≤3000m
Cycle Life		≥6000(25°C±2°C,70%EOL)
Installation		Wall-Mounted, Floor-Mounted, Stack-Mounted
Communication		CAN2.0, RS485, Optional module, (WiFi+Bluetooth+APP)
Warranty Period ^[4]		10 years
Energy Throughput ^[4]		16 MWh
Certification		UN38.3, MSDS, CE, CB, VDE2510-50, FCC, UL1973, UL9540A, CEC

[1] Max. 64 pcs can parallel with CAN-Box.

[2] DC Usable Energy, test conditions: 100% DOD, 0.5C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

[3] Operating current is affected by temperature and SOC. This max. continuous current is only supported in lithium battery mode; for lead-acid mode, please refer to the manual for the max. continuous current.

[4] Conditions apply, refer to Deye Warranty Letter.

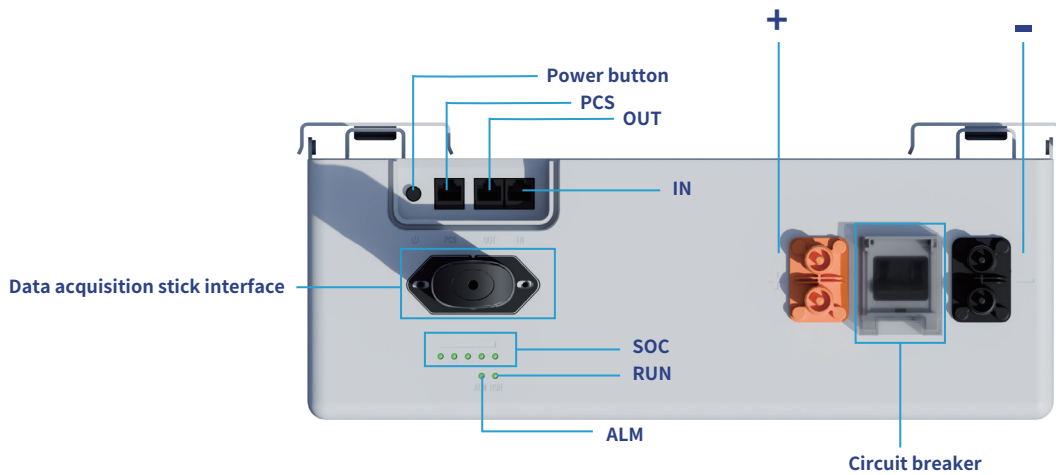

- ⊙ -: Battery negative terminal connection position(Quickly plug and unplug).
- ⊙ +: Battery positive terminal connection position(Quickly plug and unplug).
- ⊙ SOC: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ⊙ RUN light: green LED lighting to show the battery running status.
- ⊙ ALM light: red LED lighting to show the battery has been alarmed .
- ⊙ Power button: Power on or off the control battery.
- ⊙ PCS: Inverter communication terminal:(RJ45port) follow the CAN protocol (baud rate:500kbps),and RS485(baud rate:9600bps),used to output battery information to the inverter.
- ⊙ OUT: parallel Communication Terminal:(RJ45port) Connect "IN"Terminal of Next battery,for Communication between multiple parallel batteries.
- ⊙ IN: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery,for Communication between multiple parallel batteries.
- ⊙ Circuit breaker: Used to manually control the connection between the battery rack and external devices.
- ⊙ Data acquisition stick interface: The location to connect with your Data Logger that is used for data acquisition via WIFI or Bluetooth.

Mounting example

Stacked

Supports 6 layers in series, allows multiple clusters in parallel




Wall mounted


All support wall mounted installation, and support for multiple packs in parallel




SE-F5 Pro Model Selection and Appearance Reference



Config Version: L



Config Version: E



Config Version: C

Deye APP


Bluetooth APP Monitoring

Low Power (Bluetooth LE)

Automated upgrade



Local monitoring mode for battery

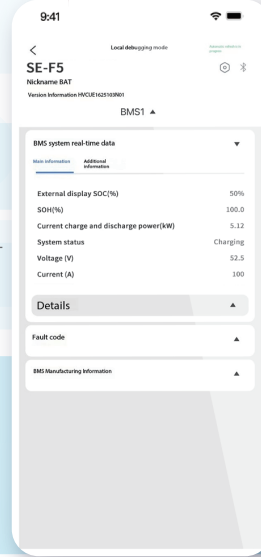


Quick Pairing

No Internet Needed

Portable Control



Remote monitoring mode for ESS(Deye Inverter&Battery)

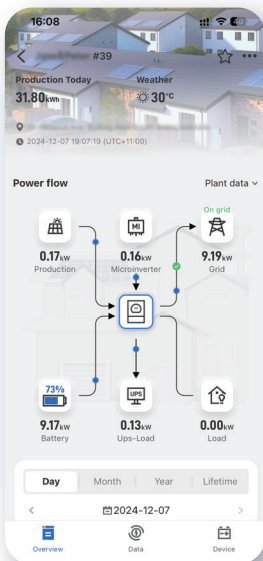

Real-time Equipment Monitoring

Intelligent Charging/Discharging Strategies

AI Data Analytics

Customized Maintenance

Smarten Up Your Home Energy



Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant



Deye ESS / Deye New Energy



www.deyeess.com / www.deyeinverter.com